


Martindale “Crane” Wheel and Gear Pullers

EACH WITH TWO SETS OF ARMS

*Adjustable arms pull straight without squeezing the work.
Set screws prevent spreading.*

The arms and 2 arm beams are drop-forged from .35% carbon steel. The crowfoot beams are crucible steel castings. Screws are a special alloy steel heat treated before machining. The working end of the screw is flat, and in its center is inserted a hardened and tempered tool steel point to engage the center hole of the shaft from which the work is to be removed. The Crowfoot style can be used as either a 2 arm or a 3 arm puller. Used as a 3 arm puller it distributes the strain more uniformly over the work; arms are locked on the work by tightening the set screw against the beam. It will stand a 50% greater strain than the 2 arm puller.

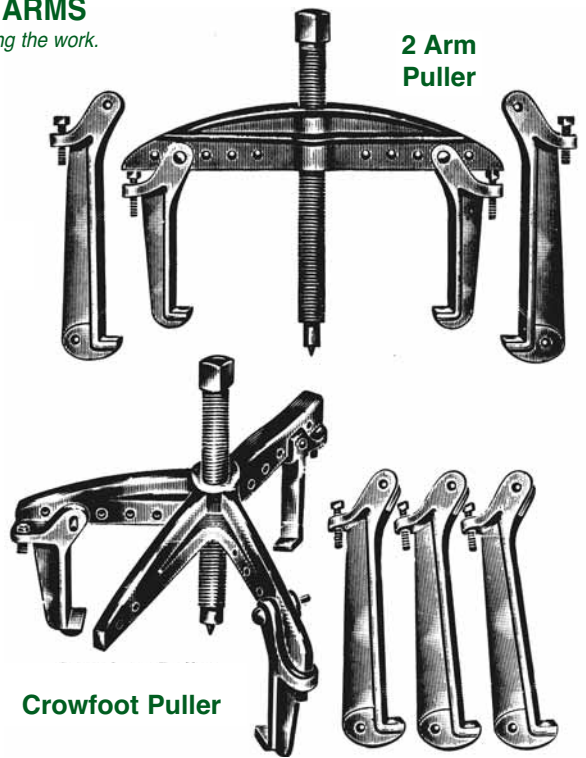

- No. 0 — For light shop work. Arms reach 3” and 6” from the beam; takes diameters up to 6”. Center screw 5/8” x 9”. Capacity 10,000 lbs. Catalog Number
No. 0 — Crowfoot Puller (Ship. Weight 8 lbs.) . . . [WHPL03](#)
- No. 2 — Medium size for machine shop work. Arms reach 6” and 10”; takes diameters up to 12”. Center screw 1” x 14”. . Capacity 26, 000 lbs.
No. 2 — 2 Arm Puller . . .(Ship. Weight 24 lbs.) . . [WHPL22](#)
- No. 3 — Designed for moderately heavy work. Arms reach 11”; takes diameters up to 18”. Center screw 1-1/4” x 16”.
No. 3 — 2 Arm Puller . . .(Ship. Weight 33 lbs.) . . [WHPL32](#)


Steelgrip Wheel and Gear Pullers

Steelgrip pullers are designed to give smooth positive pulling power with a minimum of effort. They lock into pulling position and actually hold tighter as power is applied — so they won't slip off.

Arms, screw and screw-hub are heat treated; arms are drop-forged alloy steel and all arms have adjustment

holes for long and short reach. Screws are buttress-threaded for greater pulling power.

As shown in the tables below, Armstrong® pullers are available in 2 and 3 arm models, as well as the versatile 2 arm/3 arm combination puller. Sizes range from 2 ton to 13 ton pulling capacity.

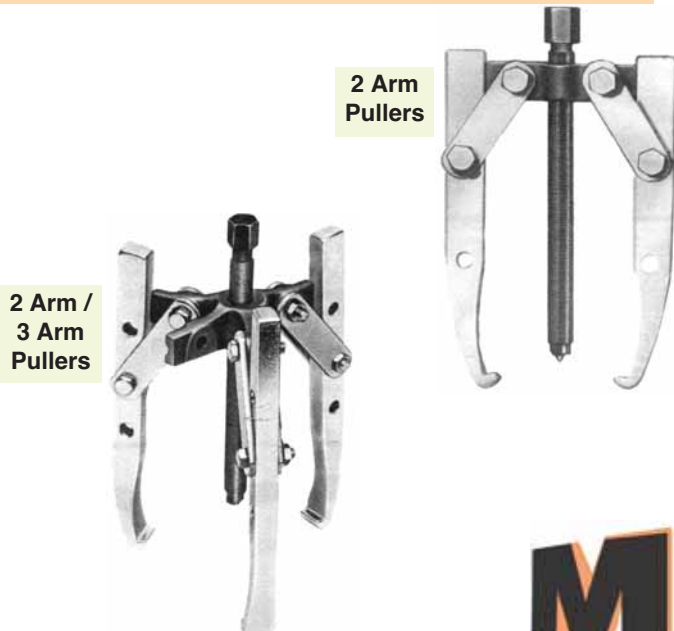

2 Arm					
Max. Reach	Spread	Screw Diam.	Capacity	Weight	Catalog Number
3-1/4"	0 - 4"	3/8"	2-ton	14 oz.	WHPU71431
3-1/4"	0 - 6"	9/16"	5-ton	1.75 lbs.	WHPU71435
8-3/4"	0 -9-1/2"	11/16"	7-ton	5.3 lbs.	WHPU72422
11"	0 -12"	13/16"	13-ton	10.6 lbs.	WHPU72423
15-1/4"	0 -15-1/2"	13/16"	13-ton	20.5 lbs.	WHPU72424

2/3 Arm					
Max. Reach	Spread	Screw Diam.	Capacity Lbs.	Weight	Catalog Number
3-1/4"	0 - 4-3/4"	3/8"	2-ton	1.31 lbs.	WHPU71401
5"	0 - 10-1/2"	11/16"	7-ton	6.13 lbs.	WHPU71405
11"	0 -12"	13/16"	13-ton	31.19 lbs	WHPU72433
15-1/4"	0 - 17"	13/16"	13-ton	18.78 lbs	WHPU72434



MARTINDALE • PO Box 430 • Cleveland, OH 44107
 Phone (216) 521-8567 • Fax Local 521-9476 / USA & Canada (800) 344-9191
 E-Mail: sales@martindaleco.com
 Web Site: www.martindaleco.com